

GF22 / GF22W

2x 2" Passive Point Source Column Loudspeaker




The GF22 is a passive column loudspeaker designed to be installed with its own brackets directly on the wall.

The GF22 is a full-range bass reflex passive loudspeaker sharing the same form factor of the GF82 loudspeaker for easy installation in mixed configuration.

The resilient ABS cabinets suite both outdoor and indoor applications in permanent installations for music and speech in conference rooms, hotels, bars, restaurants and retail shops.

Frequent Applications

Retail	Cafes, Bistros & Restaurants
Hotels & Resorts	Fitness & Wellness

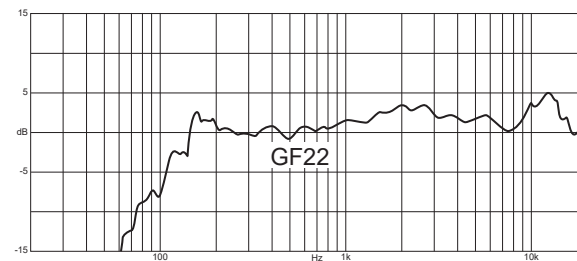

General	
Type	Passive loudspeaker
Transducers	2x 2" ferrite mag. woofer
Frequency Response	105 Hz - 20 kHz (-10 dB)
Max SPL ¹	108 dB (peak)
Power Handling	25 W
Nominal Impedance	16 Ω
Coverage	V. 90° H. 90°
Dimensions (WxHxD)	60x590x72 mm (2.36x23.23x2.83 in)
Weight	0.8 kg (1.76 lb)
Material	ABS
IP rating	IP56
Color	Black (GF22) White (GF22W)

¹ Maximum SPL is calculated using a signal with crest factor 4 (12dB) measured at 1 m.

Suggested amplifiers

GA201	up to 4 pcs/ch @ 8Ω
-------	---------------------

