



TRX218S *passive sub*

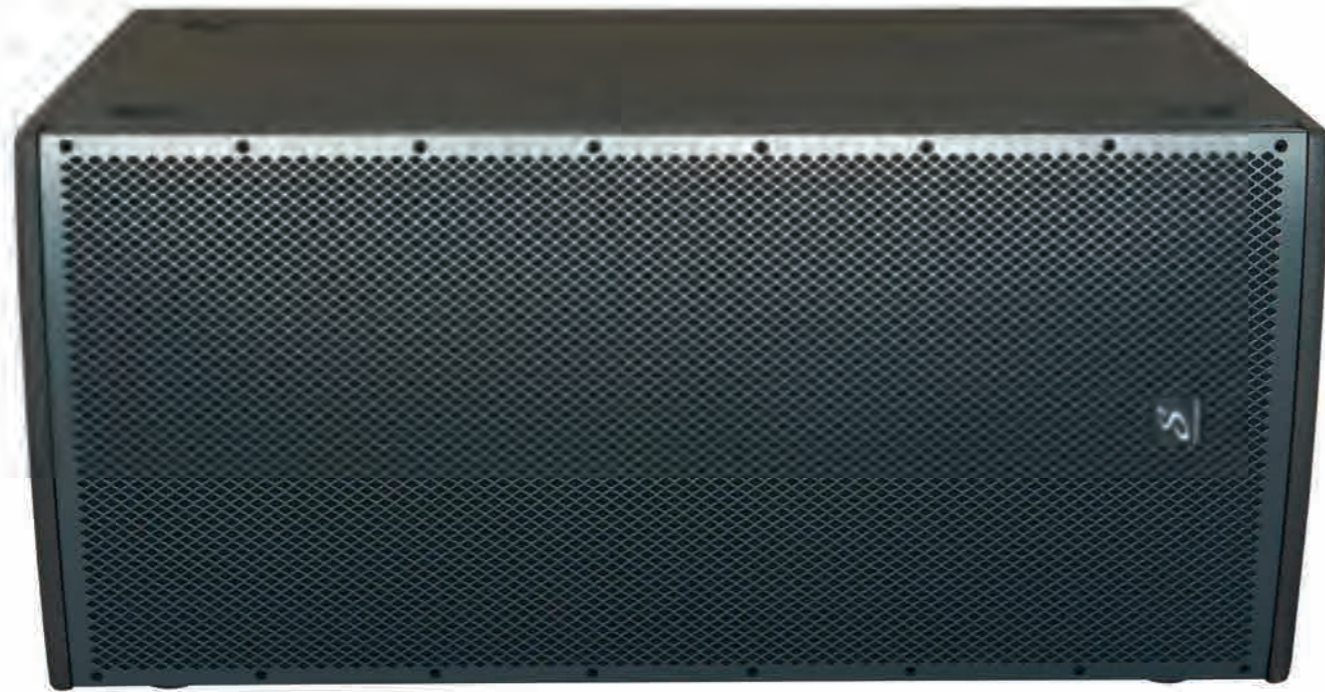

passive sub V218S

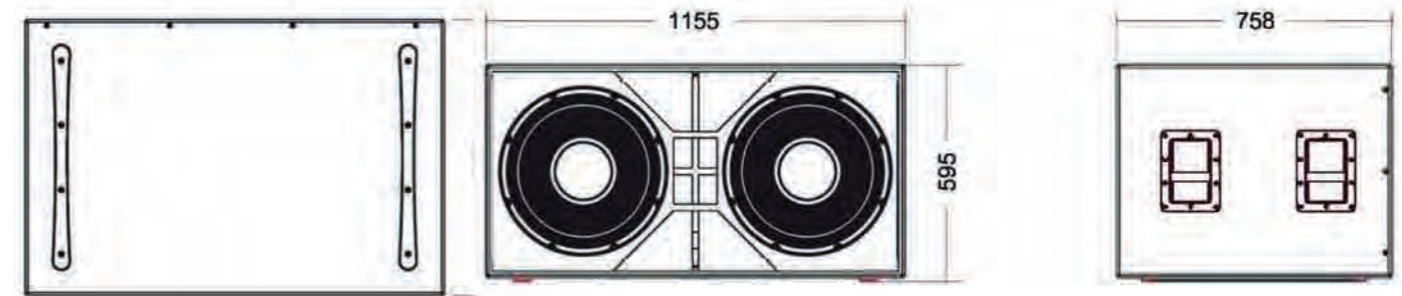

	TRX218S
MAX SPL PEAK	137dB
PGM	2400W
RMS	1200W
WEIGHT	84kg
Cabinet type	passive line array sub woofer
Frequency response	33Hz - 150Hz
Sensitivity 1w@1m	100dB +/-3dB
LF Driver	2 x 18" / 4" VC
Impedance	4 ohm
Crossover frequency	-
Dimensions (wxhxd)	1200 x 520 x 700mm

	V218S
MAX SPL PEAK	138dB
PGM	4000W
RMS	2000W
WEIGHT	83kg
Cabinet type	passive line array sub woofer
Frequency response	32Hz - 200Hz
Sensitivity 1w@1m	99dB +/-3dB
LF Driver	2 x 18" / 4" VC
Impedance	4 ohm
Crossover frequency	100Hz
Dimensions (wxhxd)	1115 x 595 x 758mm

TRX *passive*

TRX *active*



durable MDF cabinets

cast aluminium speaker chassis

1" throat compression drivers

hard wearing paint finish

multiple M10 flying points

recessed carry handles

two inputs with EQ on active models

rear mount castors on TRX-215 model

low-cut filter on active models

35mm top-hat on 10/12/15 and 15/18 sub models

	TRX-10	TRX-12	TRX-15	TRX-15M	TRX-215	TRX-15S	TRX-18S
MAX SPL	124dB	126dB	126dB	127dB	132dB	128dB	130dB
PEAK	600W	1000W	1000W	1000W	2000W	2400W	2400W
PGM	300W	500W	500W	500W	1000W	1200W	1200W
RMS	150W	250W	250W	250W	500W	600W	600W
WEIGHT	19kg	23kg	28.6kg	27kg	48kg	35.2kg	47.5kg
Cabinet type	2-way passive	2-way passive	2-way passive	2-way passive	2-way passive	passive sub woofer	passive sub woofer
Frequency response	60Hz - 20kHz	50Hz - 20kHz	45Hz - 20kHz	45Hz - 20kHz	45Hz - 20kHz	40Hz - 250Hz	38Hz - 250Hz
Sensitivity 1w@1m	94dB	96dB	96dB	97dB	99dB	96dB	96dB
Coverage (h x v)	80 x 60 degree	80 x 60 degree	80 x 60 degree	80 x 60 degree	80 x 60 degree	-	-
Nominal Impedance	8 ohm	8 ohm	8 ohm	8 ohm	4 ohm	8 ohm	8 ohm
LF Driver	10" / 50mm VC	12" / 65mm VC	15" / 65mm VC	15" / 65mm VC	2x15" / 65mm VC	15" / 100mm VC	18" / 100mm VC
HF Driver	1.35" / 34mm VC	1.35" / 34mm VC	1.35" / 34mm VC	1.35" / 34mm VC	1.75" / 44mm	-	-
Crossover frequency	2kHz	2.2kHz	2kHz	2.2kHz	2.2kHz	-	-
Input connection	2 x 4-pole	2 x 4-pole	2 x 4-pole	2 x 4-pole	2 x 4-pole	2 x 4-pole	2 x 4-pole
Dimensions (wxhxd)	354 x 555 x 426mm	409 x 628 x 472mm	453 x 710 x 518mm	429 x 635 x 484mm	469 x 1050 x 538mm	479 x 581 x 548mm	567 x 667 x 600mm

For specification of TRX-218S go to line-array page 80

	TRX-10A	TRX-12A	TRX-15A	TRX-15MA	TRX-215A	TRX-15SA	TRX-18SA
MAX SPL	124dB	126dB	126dB	127dB	132dB	128dB	129dB
AMP PEAK	800W	1000W	1000W	1000W	2000W	2000W	2000W
AMP PGM	400W	500W	500W	500W	1000W	1000W	1000W
AMP RMS	200W	250W	250W	250W	500W	500W	500W
WEIGHT	20.8kg	25.5kg	31kg	24.7kg	54.7kg	47.6kg	57.8kg
Cabinet type	2-way active	2-way active	2-way active	2-way active	2-way active	active sub woofer	active sub woofer
Frequency response	60Hz - 18kHz	50Hz - 20kHz	45Hz - 20kHz	45Hz - 20kHz	45Hz - 20kHz	35Hz - 250Hz	38Hz - 250Hz
Input sensitivity	-10dBv	-10dBv	-10dBv	-10dBv	-10dBv	-10dBu	-10dBu
Coverage (h x v)	80 x 60 degree	80 x 60 degree	80 x 60 degree	80 x 60 degree	80 x 60 degree	-	-
LF Driver	10" / 50mm VC	12" / 65mm VC	15" / 65mm VC	15" / 65mm VC	2x15" / 65mm VC	15" / 100mm VC	18" / 75mm VC
HF Driver	1.35" / 34mm VC	1.35" / 34mm VC	1.35" / 34mm VC	1.35" / 34mm VC	1.75" / 44mm VC	-	-
Crossover frequency	2kHz	2.2kHz	2kHz	2.2kHz	2.2kHz	80/100Hz	80/100Hz
Connection	2 x XLR/JACK input XLR output	2 x XLR/JACK input XLR output	2 x XLR/JACK input XLR output	2 x XLR/JACK input XLR output	2 x XLR/JACK input XLR output	XLR/JACK input XLR output	XLR/JACK input XLR output
Dimensions (wxhxd)	354 x 555 x 426mm	409 x 628 x 472mm	453 x 710 x 518mm	429 x 635 x 484mm	472 x 1050 x 538mm	479 x 581 x 548mm	567 x 667 x 600mm

TRX series